




SpecterOS 3.0 **OPTICAL SIGHT**

The **SpecterOS 3.0** is a lightweight and rugged 3x Optical Sight designed for modern military and security applications. Incorporating an illuminated reticle with range finder and proprietary Rapid Aiming Feature, the **SpecterOS 3.0** has the unique ability to offer rapid engagement in CQB applications while providing precise aiming at distant targets. A one-piece aluminum housing coupled with shock-absorbing rubber bumpers enable the sight to withstand the severe stresses of modern combat operations. The device can be supplied with either a ballistically-calibrated reticle or calibrated external elevation and windage adjustments and may be mounted directly to flat-top receivers or M16/AR15 handles. Optional MIL-STD-1913 auxiliary mounting rails enable flexible mounting solutions for other accessories.

The **SpecterOS 3.0** is built to stringent quality assurance standards in Canada's most advanced optical manufacturing facility and is specifically designed for use by the most demanding customers.

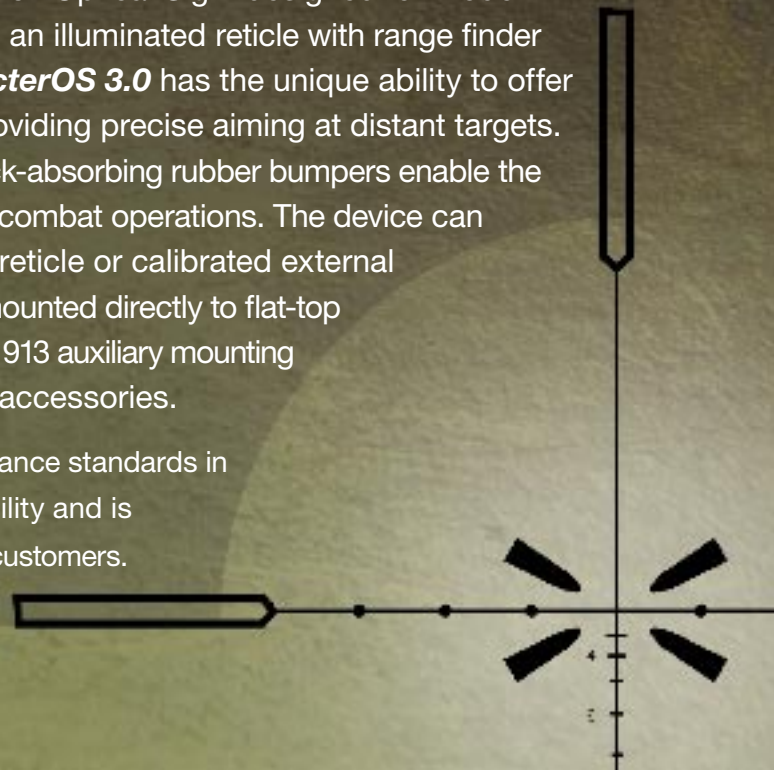

SpecterOS 3.0 OPTICAL SIGHT



Specifications

Magnification 3.1x nominal
 Length 135mm nominal
 Width 65mm nominal with bumpers
 Height 77mm nominal with bumpers
 Weight 415g nominal
 Illumination source Battery-powered LED
 Illumination settings 11 visible, 3 night vision
 Reticle Dual-thickness crosshair with
 Rapid Aiming Feature and range finder



p/n ATOS3.0A with Handle Mount

Eye Relief 66mm
 Field of View 6 degrees
 Exit Pupil 8mm
 Fixed Focus Range 20m to infinity
 Battery Type CR 123 (3v Lithium)
 Battery Life 3.1 years average
 Exterior Finish Black anodized aluminum
 Ballistic calibration




p/n ATOS3.0B2 'Marksman' Model

Model A: 5.56 NATO (in reticle)
 Model B: 100m-600m external adjustment
 for 5.56 or 7.62 NATO (others available)
 Adjustment resolution 0.5 minute of angle
 Adjustment range 120 minutes of angle
 Base requirement Mil-Std-1913 'Picatinny Rail'
 or AR15/M16 carry handle
 Attachment Single wing nut with
 return-to-zero repeatability

Environmental
 Waterproof: 66 ft for 2 hours min
 Shockproof: 450 g's

Options Rubber bumpers, Mil-Std-1913 rails,
 lens covers, ARD

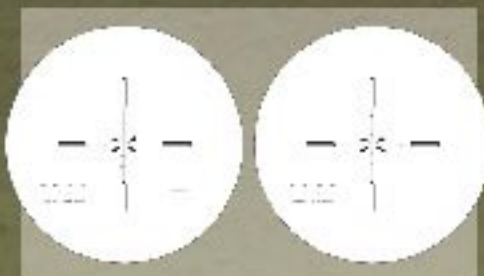

ATOS3.0A reticle

ATOS3.0B reticle